

Analysis and Simulation of Load Frequency Control in Power System with Reheater Steam Turbine

Mehdi Riahinasab^{1,2}, Neda Behzadfar^{*1,2}, Homa Movahednejad^{2,3}

Abstract—Load changes affect the frequency of electrical networks. Frequency stabilization is very important due to the increasing penetration of renewable energy sources in power systems. The main task of load frequency control is to keep the system frequency according to the specified nominal value and to maintain the correct amount of exchange power between the control areas. In this paper, load frequency control in single-area power system is studied and simulated. Each area has a steam generating unit with a reheat steam turbine. The system equations are expressed in the state space and the system model is determined based on the transfer function. The simulation results have been obtained using Matlab software. The simulation results show the effect of reheater's parameters on the transient dynamic behavior of the system.

Keywords: load frequency control, two-area power system, state space, reheater

1. Introduction

Power systems are a complex system, which to control them in steady state, different control loops are needed [1-3]. All production units that have speed governors, regardless of the position and location of the load change, they contribute to the overall change in production [4-6]. Frequency plays an essential role in the power system which must be well and properly controlled [7-9]. Sudden load changes in any control area in the power system cause the frequency and power of the transmission line connected to other areas of the power system to change. Therefore, primary and secondary frequency control loops are used in the power system [10,11].

The function of the secondary frequency control, or load frequency control (LFC), is to keep the frequency at the desired level after the disturbance [12-15]. This system corrects the area control error based on the initial frequency and returns the frequency to the nominal value [16-19].

LFC or automatic generation control (AGC) is one of the main operations that is performed every day according to the performance in a modern power system [20,21]. Load frequency control is necessary to create better control in order to achieve a lower effect on the frequency and power deviations of the connection line after load perturbation

[22,23].

One of the important actions for reliability and quality assurance in power system operation is LFC. A number of subsystems that are connected to each other through transmission lines make up the power system. Each subsystem must meet requirements such as supplying the load of the area and regulating the frequency. Due to the expansion of the use of renewable energies, various studies have been carried out in the field of frequency load control [24-31].

The design of a LFC for power systems with steam turbines is presented in [32], which aims to reduce the oscillations of the output frequency deviations as quickly as possible. The proposed controller is based on H_∞ polynomial robust control theory and sufficiently guarantees the internal stability and robust performance of the closed loop system.

A neural network controller is proposed for power system load-frequency control in [33], which the steam turbine reheating effect and governor dead-band nonlinearity effect are considered.

In the control loop for frequency regulation, an energy storage system is proposed in [34], to be used when the grid is under unstable conditions or where the average frequency between different connected areas is different from zero. The studied system consists of two connection lines that are connected between two areas and each one consists of a synchronous generator, renewable energy sources, energy storage system and load.

An optimal predictive control model for the design of LFC installed in the interconnected system including different renewable energy sources is proposed in [35], which method to identify the optimal predictive control

¹Department of Electrical Engineering, Najafabad Branch, Islamic Azad University, Najafabad, Iran, m.riahinasab@pel.iaun.ac.ir

^{2*} **Corresponding Author:** Smart Microgrid Research Center, Najafabad Branch, Islamic Azad University, Najafabad, Iran, n.behzadfar@pel.iaun.ac.ir

³Department of Computer Engineering, Najafabad Branch, Islamic Azad University, Najafabad, Iran, h.movahed@pco.iaun.ac.ir

parameters to minimize integral absolute time error frequencies and tie line power deviations are used.

Matching total system output with total load demand and system losses is a requirement for successful operation of the interconnected power system [36,37]. In this paper, the aim is to simulate the power system with a reheat steam turbine. The power system consists of single-area. The simulation results show the transient behavior of the power system in response to load demand changes in area. The closed loop system of load frequency control tends to zero load frequency deviation changes.

2. Single-Area Power System Model

In this part, the model of the load frequency control system in the single-zone power system is determined based on the transfer function and in the state space.

2.1. Steam production unit structure

The stored steam energy with high pressure and temperature in the steam turbine is converted into rotational energy, which will be converted into electrical energy by the generator [38,39]. In a reheat turbine, to improve efficiency, steam after leaving the high pressure section returns to the boiler and passes through a reheater before returning to the medium pressure section [40,41]. The block diagram of a production unit with the presence of a turbine equipped with a reheater is shown in fig. 1.

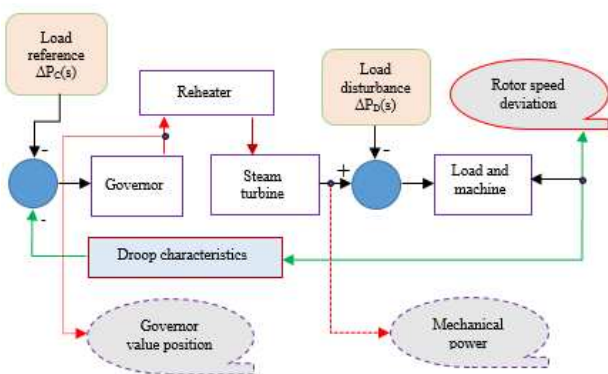


Fig. 1. Production unit structure with steam reheat turbine

The uncontrolled system has two inputs, which are: $u_1 = \Delta P_D$ and $u_2 = \Delta P_C$. ΔP_C is the control set point from the secondary frequency control mechanism and ΔP_D is the total change in load/demand (electrical power output).

The highest time constant in controlling the steam flow and turbine power belongs to the reheater. Therefore, the responses of turbines with reheater are much slower

than turbines without reheater. The steam turbine does not need a droop transient compensator.

2.2. Model based on transfer function

The display of single-area system based on transfer functions is shown infig. 2. The frequency deviation changes in an uncontrolled area can be expressed based on transfer functions as follows:

$$\Delta F(s) = H_{FC}(s) \Delta P_C(s) - H_{FD}(s) \Delta P_D(s) \quad (1)$$

where the functions $H_{FC}(s)$ and $H_{FD}(s)$ are the ratio of frequency deviation to input load changes and set point changes, respectively.

The PID (proportional–integral–derivative) controller is one of the most practical examples of the closed loop control algorithm using the concept of feedback and is used in many industrial processes. This controller minimizes the error by adjusting the process control input. This controller has been used in different systems [42-45]. An integral controller is used in the load frequency control system.

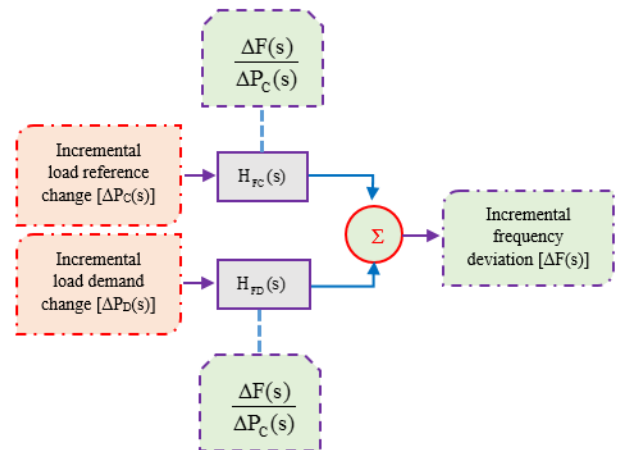


Fig. 2. Representation of a single-area power system based on transfer functions

Considering that the system load is constantly changing, the output of the generating units should change automatically. In the load frequency control system, the $\Delta P_C(s)$ (load reference set-point) input is determined by the system frequency deviation changes using the integrator controller:

$$\Delta P_C(s) = \frac{\beta K_I}{s} \Delta F(s) \quad (2)$$

Therefore, in the LFC system, the transfer function of the frequency deviation changes to the input load changes is as follows:

$$H_F(s) = \frac{\Delta F(s)}{\Delta P_D(s)} = \frac{-s H_{FD}(s)}{s + K_I \beta H_{FC}(s)} \quad (3)$$

2.3. Model in state space

The equations of the LFC for the single-area power system in the state space considering one input (u_1) are [46]:

$$\frac{d}{dt}x_1 = -\frac{1}{T_P}x_1 + \frac{K_P}{T_P}x_2 - \frac{K_P}{T_P}u_1 \tag{4}$$

$$\frac{d}{dt}x_2 = -\frac{1}{T_T}x_2 + \frac{K_T}{T_T}x_3 \tag{5}$$

$$\frac{d}{dt}x_3 = -\frac{K_G F_H}{T_G R_P}x_1 - \frac{1}{T_R}x_3 + \left(\frac{1}{T_R} - \frac{F_H}{T_G}\right)x_4 + \frac{K_G F_H}{T_G}x_5 \tag{6}$$

$$\frac{d}{dt}x_4 = -\frac{K_G}{T_G R_P}x_1 - \frac{1}{T_G}x_4 + \frac{K_G}{T_G}x_5 \tag{7}$$

$$\frac{d}{dt}x_5 = -K_I \beta x_1 \tag{8}$$

where x_1 shows the changes in the frequency deviation of the area and u_1 shows the changes in the load. Also, variable x_5 indicates the output of the integrator controller. The total change in mechanical output power is show with x_2 .

The droop parameter of the primary frequency is R_p , the time constant and gain of the governor are T_G and K_G , the time constant and gain of the turbine are T_T and K_T , the gain and time constant of the power system and load are K_p and T_p .

3. Simulation Results

Unpredictable deviation of the load demand from the nominal value changes the operating point of the power system and therefore, deviations in the nominal frequency and planned power exchanges may be created in the system. The parameters of the studied single-area power system with reheat steam turbine are listed in Table 1.

Table 1. Parameters of the studied power system

| Parameters | Value |
|------------|-------|
| K_p | 1 |
| T_p | 10 |
| T_G | 0.2 |
| K_G | 1 |
| R_p | 0.05 |
| K_T | 1 |
| T_T | 0.3 |
| T_R | 7 |
| F_H | 0.3 |
| β | 0.5 |
| K_I | 0.4 |

Figures 3 and 4 show the results of the simulation in the

state without controller, which are the system output frequency changes and turbine mechanical power changes, respectively. The eigenvalues of the system matrix in this case are: -5.7065, -1.8779 and -0.4959±0.4698.

The system has two real non-oscillatory modes and one oscillatory mode that is damped with a damping factor of 0.726.

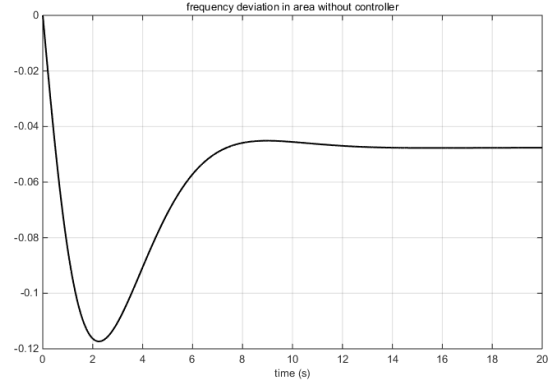


Fig. 3. Frequency deviation in power system without controller

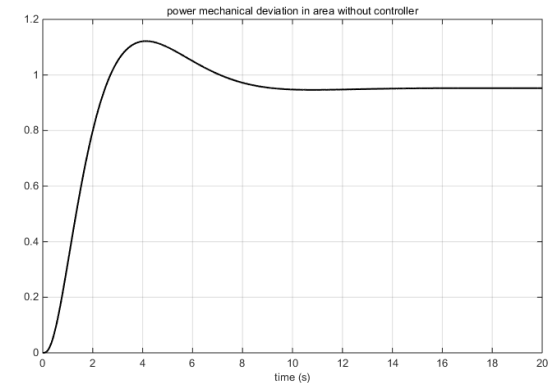


Fig. 4. Power mechanical deviation in power system without controller

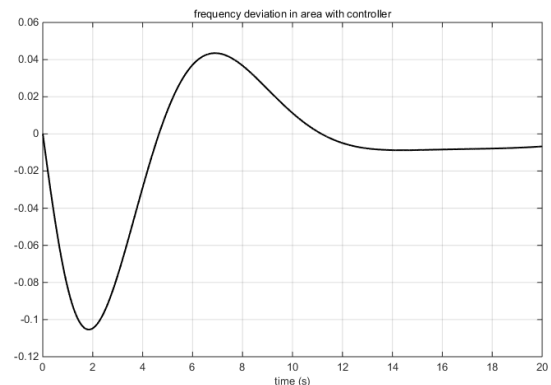


Fig. 5. Frequency deviation in power system with controller

By using the integral controller, frequency fluctuations are eliminated from the closed loop system. Figs. 5 and 6 show the frequency and mechanical power changes of the turbine output in the closed loop system, respectively. As can be seen, the integrator controller has caused the

changes in the output frequency of the system to tend to zero. In this case, the special values of the system are: $-5.6936, -1.9996, -0.1469, -0.3689 \pm j0.5321$.

The system has three non-oscillatory modes. The oscillation mode of the system has a damping factor of 7. Fig.7 shows the output of the integrator controller in the closed loop system. As it can be seen, in the closed loop system, the response has reached a steady state at the infinite moment.

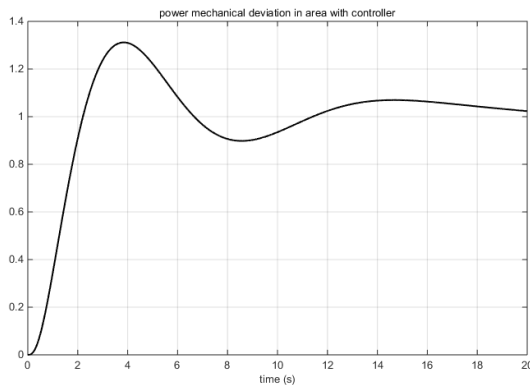


Fig. 6. Power mechanical deviation in power system with controller

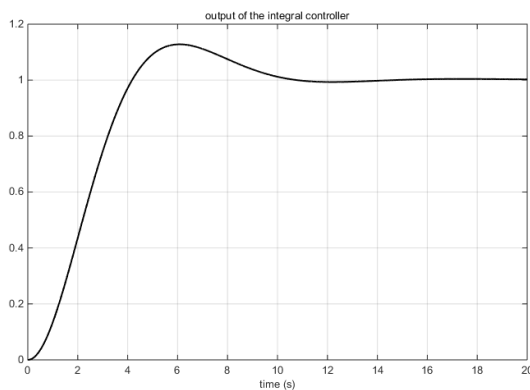


Fig. 7. Integral controller output system with controller

5. Conclusion

Load frequency control is an important function in modern energy management systems. In this paper, the frequency deviation changes in the power system with reheat steam turbine were studied. Single-area were considered for the target system. The first order differential equations in the state space were expressed for power system. Then, the simulation results were obtained using Matlab software. The simulation results were obtained for different conditions and the transient behavior of the system was shown.

References

- [1] R. Shahedi, K. Sabahi, M. Tayana, A. Hajizadeh, "Self-tuning fuzzy PID controller for load frequency control in ac micro-grid with considering of input delay", *Journal of Intelligent Procedures in Electrical Technology*, vol. 9, no. 35, pp. 19-26, Dec. 2019, dor: 20.1001.1.23223871.1397.9.35.3.6.
- [2] G. Shahgholian, "A brief review on microgrids: Operation, applications, modeling, and control", *International Transactions on Electrical Energy Systems*, vol. 31, no. 6, Article Number. e12885, June 2021, 10.1002/2050-7038.12885.
- [3] A. Latif, S. M. S. Hussain, D. C. Das, T. S. Ustun, "State-of-the-art of controllers and soft computing techniques for regulated load frequency management of single/multi-area traditional and renewable energy based power systems", *Applied Energy*, vol. 266, Article Number: 114858, May 2020, doi: 10.1016/j.apenergy.2020.114858.
- [4] E. Aghadavoodi, G. Shahgholian, "A new practical feed-forward cascade analyze for close loop identification of combustion control loop system through RANFIS and NARX", *Applied Thermal Engineering*, vol. 133, pp. 381-395, Mar. 2018, doi: 10.1016/j.applthermaleng.2018.01.075.
- [5] S.A. Seyed-Beheshti-Fini, S.M. Shariatmadar, V. Amir, "Frequency control in multi-carrier microgrids with the presence of electric vehicles based on adaptive neuro fuzzy inference system controller", *Journal of Intelligent Procedures in Electrical Technology*, vol. 14, no. 55, pp. 27-42, Dec. 2023.
- [6] N. Kazemi-Esfeh, M. Baharizadeh, "A decentralized control method based on virtual frequency-voltage frame for accurate active and reactive powers sharing in microgrids", *Journal of Intelligent Procedures in Electrical Technology*, vol. 14, no. 55, pp. 55-66, Dec. 2023.
- [7] G. Shahgholian, S. Yazdekhashti, P. Shafaghi, "Dynamic analysis and stability of the load frequency control in two area power system with steam turbine", *Proceeding of the IEEE/ICCEE*, pp. 40-46, Dubai, Dec. 2009, doi: 10.1109/ICCEE.2009.95.
- [8] N. Sivadanam, N. Bhookya and S. Maheswarapu, "Dynamic performance enhancement of interconnected hybrid thermal power system in the presence of electric vehicles, Case studies in Thermal engineering", vol. 26, Article Number: 101045, 2021, doi: 10.1016/j.csite.2021.101045.

- [9] A. Shoulaie, M. Bayati-Poudeh, G. Shahgholian, "Damping torsional torques in turbine-generator shaft by novel PSS based on genetic algorithm and fuzzy logic", *Journal of Intelligent Procedures in Electrical Technology*, vol. 1, no. 2, pp. 3-10, Sept. 2010, doi: 10.1001.1.23223871.1389.1.2.1.2.
- [10] V. Gholamrezaie, M.G. Dozein, H. Monsef, B. Wu, "An optimal frequency control method through a dynamic load frequency control (LFC) model incorporating wind farm", *IEEE Systems Journal*, Vol. 12, No. 1, pp.392-401, March 2018, doi:10.1109/JSYST.2016.2563979.
- [11] S. Zhang, H. Liu, F. Wang, T. Yan and K. Wang, "Secondary frequency control strategy for BESS considering their degree of participation", *Energy Reports*, vol. 6, pp. 594-602, 2020, doi: 10.1016/j.egyr.2020.11.183.
- [12] K. Khani, G. Shahgholian, "Analysis and optimization of frequency control in isolated microgrid with double-fed induction-generators based wind turbine", *Journal of International Council on Electrical Engineering*, vol. 9, no. 1, pp. 24-37, Feb. 2019, doi: 10.1080/22348972.2018.1564547.
- [13] Y. Wang, Y. Guo, D. Zhang, "Optimal ancillary control for frequency regulation of wind turbine generator based on improved fatigue load sensitivity", *International Journal of Electrical Power and Energy Systems*, vol. 137, Article Number: 107751, May 2022, doi: 10.1016/j.ijepes.2021.107751.
- [14] M. Ma, C. Zhang, X. Liu and H. Chen, "Distributed model predictive load frequency control of the multi-area power system after deregulation", *IEEE Trans. on Industrial Electronics*, vol. 64, no. 6, pp. 5129-5139, June 2017, doi: 10.1109/TIE.2016.2613923.
- [15] G. Shahgholian, "PID controller design for load-frequency control in power system by hydro-turbine including transient droop compensation", *Journal of Iranian Dam and Hydroelectric Powerplant*, vol. 2, no. 5, pp. 50-64, 2015, doi: 10.1001.1.23225882.1394.2.5.2.7.
- [16] H.H. Alhelou, M.E. Hamedani-Golshan, R. Zamani, E. Heydarian-Forushani and P. Siano, "Challenges and opportunities of load frequency control in conventional, modern and future smart power systems: A comprehensive review", *Energies*, vol. 11, Article Number: 2497, 2018, doi: 10.3390/en11102497.
- [17] M. Mahdavian, G. Shahgholian, M. Janghorbani, B. Soltani, N. Wattanapongsakorn, "Load frequency control in power system with hydro turbine under various conditions", *Proceeding of the IEEE/ECTICON*, pp. 1-5, Hua Hin, Thailand, June 2015, doi: 10.1109/ECTICON.2015.7206938.
- [18] A. Rahman, L.C. Saikia, N. Sinha, "Load frequency control of a hydro-thermal system under deregulated environment using biogeography-based optimised three-degree-of-freedom integral-derivative controller", *IET Generation, Transmission and Distribution*, Vol. 9, No. 15, pp. 2284-2293, Nov. 2015, doi: 10.1049/iet-gtd.2015.0317.
- [19] A. Aziz, A.T. Oo and A. Stojcevski, "Frequency regulation capabilities in wind power plant", *Sustainable Energy Technologies and Assessments*, vol. 26, pp. 47-76, 2018, doi: 10.1016/j.seta.2017.10.002.
- [20] D. H. Tungadio, Y. Sun, "Load frequency controllers considering renewable energy integration in power system", *Energy Reports*, Vol. 5, pp. 436-454, 2019, doi: 10.1016/j.egyr.2019.04.003.
- [21] A. Khanjanzadeh, S. Soleymani, B. Mozafari, M. Fotuhi, "Integrated multi-area power system with HVDC tie-line to enhance load frequency control and automatic generation control", *Electrical Engineering*, vol. 102, pp. 1223-1239, 2020, doi: 10.1007/s00202-020-00944-5.
- [22] R. Shankar, S. R. Pradhan, K. Chatterjee, R. Mandal, "A comprehensive state of the art literature survey on LFC mechanism for power system", *Renewable and Sustainable Energy Reviews*, vol. 76, pp. 1185-1207, Sept. 2017, doi: 10.1016/j.rser.2017.02.064.
- [23] G. Magdy, E. A. Mohamed, G. Shabib, A. A. Elbaset, Y. Mitani, "Microgrid dynamic security considering high penetration of renewable energy", *Protection and Control of Modern Power Systems*, vol. 3, Article Number: 23, 2018, doi: 10.1186/s41601-018-0093-1.
- [24] A. Pappachen, A. P. Fathima, "Critical research areas on load frequency control issues in a deregulated power system: A state-of-the-art-of-review", *Renewable and Sustainable Energy Reviews*, vol. 72, pp. 163-177, 2017, doi: 10.1016/j.rser.2017.01.053.
- [25] L. Fan, Z. Miao, D. Osborn, "Wind farms with HVDC delivery in load frequency control", *IEEE Trans. on Power Systems*, vol. 24, no. 4, pp. 1894-1895, Nov. 2009, doi: 10.1109/TPWRS.2009.2030256.
- [26] G. Shahgholian, "Power system stabilizer application for load frequency control in hydro-electric power plant", *Engineering Mathematics*, Vol. 2, No. 1, pp. 21-30, Feb. 2017, doi:10.11648/j.engmath.20170201.14.
- [27] N. Pathak, A. Verma, T. S. Bhatti and I. Nasiruddin, "Modeling of HVDC tie links and their utilization in AGC/LFC operations of multiarea power systems",

- IEEE Trans. on Industrial Electronics, vol. 66, no. 3, pp. 2185-2197, March 2019, doi: 10.1109/TIE.2018.2835387.
- [28] E. Rakhshani, D. Remon, P. Rodriguez, "Effects of PLL and frequency measurements on LFC problem in multi-area HVDC interconnected systems", International Journal of Electrical Power and Energy Systems, vol. 81, pp. 140-152, Oct. 2016, doi:10.1016/j.ijepes.2016.02.011.
- [29] T. Tao, S. Roy, S. Baldi, "Stable adaptation in multi-area load frequency control under dynamically-changing topologies", IEEE Trans. on Power Systems, vol. 36, no. 4, pp. 2946-2956, July 2021, doi: 10.1109/TPWRS.2020.3044436.
- [30] K.P.S. Parmar, S. Majhi and D.P. Kothari, "Load frequency control of a realistic power system with multi-source power generation", International Journal of Electrical Power and Energy Systems, vol. 42, no. 1, pp. 426-433, 2012, doi: 10.1016/j.ijepes.2012.04.040.
- [31] G. Shahgholian, K. Khani, M. Moazzami, "The Impact of DFIG based wind turbines in power system load frequency control with hydro turbine", Journal of Iranian Dam and Hydroelectric, vol. 1, no. 3, pp. 38-51, Winter 2015.
- [32] R.A. Maher, I.A. Mohammed, I.K. Ibraheem, "Polynomial based H_{∞} robust governor for load frequency control in steam turbine power systems", International Journal of Electrical Power and Energy Systems, vol. 57, pp. 311-317, May 2014, doi: 10.1016/j.ijepes.2013.12.010.
- [33] H.L. Zeynelgil, A. Demirören, N.S. Şengör, "Load frequency control for power system with reheat steam turbine and governor deadband non-linearity by using neural network controller", European Transactions on Electrical Power, vol. 12, no. 3, pp. 179-164, March/June 2002, doi: 10.1002/etep.4450120303.
- [34] M.W. Siti, N.T. Mbungu, D.H. Tungadio, B.B. Banza, L. Ngoma, "Application of load frequency control method to a multi-microgrid with energy storage system", Journal of Energy Storage, vol. 52, Article Number: 104629, Aug. 2022, doi: 10.1016/j.est.2022.104629.
- [35] H.H. Ali, A. Fathy, A.M. Kassem, "Optimal model predictive control for LFC of multi-interconnected plants comprising renewable energy sources based on recent sooty terns approach", Sustainable Energy Technologies and Assessments, vol. 42, Article Number: 100844, Dec. 2020, doi: 10.1016/j.seta.2020.100844.
- [36] Z. Wang, Y. Liu, "Adaptive terminal sliding mode based load frequency control for multi-area interconnected power systems with PV and energy storage", IEEE Access, vol. 9, pp. 120185-120192, 2021, doi: 10.1109/ACCESS.2021.3109141.
- [37] N. Hakimuddin, I. Nasiruddin, T.S. Bhatti, Y. Arya, "Optimal automatic generation control with hydro, thermal, gas, and wind power plants in 2-area interconnected power system", Electric Power Components and Systems, vol. 48, no. 6-7, pp. 558-571, Aug 2020, doi: 10.1080/15325008.2020.1793829.
- [38] J. Dragosavac, Ž. Janda, J.V. Milanovic, "PLC-based model of reactive power flow in steam power plant for pre-commissioning validation testing of coordinated Q-V controller", IEEE Trans. on Power Systems, vol. 26, no. 4, pp. 2256-2263, Nov. 2011, doi: 10.1109/TPWRS.2011.2127498.
- [39] J. Li, Y. Xin, B. Hu, K. Zeng, Z. Wu, S. Fan, Y. Li, Y. Chen, S. Wang, J. Wang, Y. Min, J. Li, G. Flamant, "Safety and thermal efficiency performance assessment of solar aided coal-fired power plant based on turbine steam double reheat", Energy, vol. 226, Article Number: 120277, July 2021, doi: 10.1016/j.energy.2021.120277.
- [40] G. Ma, Y. Zhang, M. Yue, Y. Shi, "Thermal economy study on the waste heat utilization of a double reheat unit under coupled steam turbine and boiler", Applied Thermal Engineering, vol. 175, Article Number: 115112, July 2020 doi: 10.1016/j.applthermaleng.2020.115112.
- [41] A. Arastou, P. Ahmadi, M. Karrari, "Modeling and parameter estimation of a steam power plant including condenser back-pressure uncertainty using operational data", IEEE Systems Journal, vol. 16, no. 2, pp. 2979-2988, June 2022, doi: 10.1109/JSYST.2021.3122228.
- [42] M. Lotfi-Forushani, B. Karimi, G. Shahgholian, "Optimal PID controller tuning for multivariable aircraft longitudinal autopilot based on particle swarm optimization algorithm", Journal of Intelligent Procedures in Electrical Technology, vol. 3, no. 9, pp. 41-50, June 2012, doi: 10.1001.1.23223871.13-91.3.9.5.4.
- [43] A. Behera, T. K. Panigrahi, P.K. Ray and A.K. Sahoo, "A novel cascaded PID controller for automatic generation control analysis with renewable sources", IEEE/CAA Journal of Automatica Sinica, vol. 6, no. 6, pp. 1438-1451, Nov. 2019, doi: 10.1109/JAS.2019.1911666.
- [44] E. Tehrani, A. ZareBidaki, M. Farahani, "Fuzzy PID tuned by a multi-objective algorithm to solve load

- frequency control problem”, *International Journal of Smart Electrical Engineering*, vol. 5, no. 2, pp. 101-109, June 2016, doi: 20.1001.1.22519246.2016.05.02.5.1.
- [45] G. Chen, Z. Li, Z. Zhang, S. Li, "An improved ACO algorithm optimized fuzzy PID controller for load frequency control in multi area interconnected power systems", *IEEE Access*, vol. 8, pp. 6429-6447, 2020, doi: 10.1109/ACCESS.2019.2960380.
- [46] G. Shahgholian, P. Shafaghi and H. Mahdavi-Nasab, "A comparative analysis and simulation of ALFC in single area power system for different turbines", *Proceeding of the IEEE/ICECTECH*, pp. 50-54, Kuala Lumpur, Malaysia, May 2010, doi: 10.1109/ICECTECH.2010.5479992.
- [47] A.O. Aluko, R.P. Carpanen, D.G. Dorrell and E.E. Ojo, "Robust state estimation method for adaptive load frequency control of interconnected power system in a restructured environment", *IEEE Systems Journal*, vol. 15, no. 4, pp. 5046-5056, Dec. 2021, doi: 10.1109/JSYST.2020.3005979.
- [48] F. Liu, Y. Li, Y. Cao, J. She, M. Wu, "A two-layer active disturbance rejection controller design for load frequency control of interconnected power system", *IEEE Trans. on Power Systems*, vol. 31, no. 4, pp. 3320-3321, July 2016, doi: 10.1109/TPWRS.2015.2480005.
- [49] R. Shankar, K. Chatterjee and R. Bhushan, "Impact of energy storage system on load frequency control for diverse sources of interconnected power system in deregulated power environment”, *International Journal of Electrical Power and Energy Systems*, vol. 79, pp. 11-26, 2016, doi:10.1016/j.ijepes.2015.12.029.