

The Effect of Annealing Heat Treatment on the Bond of Explosive-welded Copper/Steel after the ECAR Process

Mohammad Honarpoosh^{1*}, Ali Akbar Haddadi², Hadi Mansouri¹

¹Faculty of Mechanical Engineering, University of Kashan, Kashan, Iran

²Faculty of Engineering, Jasb branch, Islamic Azad University

*Email of Corresponding Author: honarpoosh@kashanu.ac.ir

Received: October 14, 2019; Accepted: January 6, 2020

Abstract

Equal channel angular rolling (ECAR) process is one of the severe plastic deformation (SPD) methods that have been used to make ultra-fine grain (UFG) materials with improving the mechanical properties of samples. After performing the process at several paths, a large strain is applied to the material that can cause decreasing the grain size and improving the mechanical and physical properties of the metal. In this paper, the effects of annealing thermal treatment at various temperatures and times on the weld bond of bimetal explosive welded stainless steel-copper sheet during the equal channel angular rolling process have been investigated. For this purpose, after performing the ECAR process and thermal treatment on bimetal sheet, hardness and welding interface were studied. The results showed that performing thermal treatment at different temperatures caused the formation of intermetallic compounds in the weld bond, which would change the hardness of this region. Also, increasing the annealing time increased the thickness of the weld bond.

Keywords

ECAR, Annealing, Explosive-welded Bimetal, Interface, Hardness

1. Introduction

Today, severe plastic deformation processes have been considered by the researchers to improve the mechanical properties of metal materials by cutting grain size. Processes such as high pressure torsion [1], cyclic extrusion compression [2], equal channel angular pressing [3], accumulative roll bonding [4], constrained groove pressing [5], etc. are the examples in this field. Equal channel angular rolling is one of the severe plastic deformation methods, in which the metal sheet experiences a great strain. In this process, continuous shear deformation is created without significant changes in sheet thickness. The advantages of this process can be considered as, being easy to handle, taking different routes to achieve a more uniform structure dependent on applied uniform strain and being flexible for various lengths of different sheets [6-8]. Lee et al. [9] examined the microstructure of the 1050 aluminum sheet with this process. In 2003, Nam et al. examined the microstructure of the 7050 aluminum sheet during ECAR process [10]. In 2007, Cheng et al. dealt with the draw ability changes on the AZ31 magnesium sheet at room temperature during this process and reported the positive effects [11]. They also looked at the effects of the mold clearance on the expansion of AZ31 crystalline forms of magnesium [12]. In 2011, Habibi et al. studied pure nano grain copper with high strength and high electrical conductivity during ECAR [13]. Also in 2011, Hasani et al. studied ECARed AZ31 magnesium alloy to achieve nano grain magnesium

alloy. In 2012, Azimi et al. examined the mechanical and micro structural properties of the Al1100 aluminum alloy during several passes of this process [15]. The study of the residual stresses distribution in the thickness of aluminum sheet 5053 by layer removal technique and X-ray diffraction in 2012 was carried out by Mahmoodi et al. [16]. In the year 2012, Kvackaj studied on TEM images from the OFHC copper structure after the ECAR process [17]. Mahmoodi et al. [18] investigated correlation between structural parameters and mechanical properties of Al5083 sheets processed by ECAR process. Honarpisheh et al. [19] studied the effect of ECAR process on the thermal conductivity of Aluminum alloy 3003. On the other hand, explosive welding sheets are recently used as new materials in various industries [20, 21]. Providing simultaneously several mechanical and physical properties is one of the benefits of these products. The study of secondary processes on these products is a new subject of interest by various researchers. These include extrusion [22], cold rolling [23-25] and incremental forming [26, 27]. In this paper, for the first time, the effects of thermal operation are investigated on the weld bond formed on ECARed Steel-Copper explosive welded bimetal. In fact, the attractiveness of the study on ECAR process is on explosive welding sheets, which is then subjected to thermal operation, in order to study changes in the weld band.

2. Materials and Methods of Research

The bimetal sheet used in this study consists of AISI 304L low-carbon stainless steel and Bahonar's commercial copper with a purity of 99.9%. The chemical composition of these two sheets obtained from quantum analysis is presented in Table 1.

Table1. Chemical composition of stainless steel and pure commercial copper elements obtained from the quantum test

Elements combination	N	Ni	Cr	S	P	Si	Mn	C
Low-carbon stainless steel AISI 304L	0-0.10	8.0-12.0	18.0-20.0	0-0.03	0-0.045	0-0.75	0-2.0	0-0.03
Pure commercial copper				0.004 Max			99.9% Cu	

The thickness of primary sheet used in this study is 3 mm, which is produced by the explosive welding method. The thickness of each layer of steel and copper is 1.50 mm. The sheets are annealed for 3 hours at 300° C. Sheets with a width of 40 mm and length of 200 mm are cut and prepared to execute the ECAR process. The process is carried out by rolling machine with a diameter of 120 mm, equipped with two different thickness channels. The mold angle is 120° and the input channel thickness is 3 mm and the output channel thickness is 2.97 mm. High friction increases the driving force and facilitates feeding the sheet into the mold. In Figure 1, the device used in this study is visible. After performing the ECAR operation on copper-steel sheets in 4 passes, the annealing thermal treatment was performed at 3 different temperatures of 450, 550, and 650° C for 1 hour at 4 pass ECARed samples.

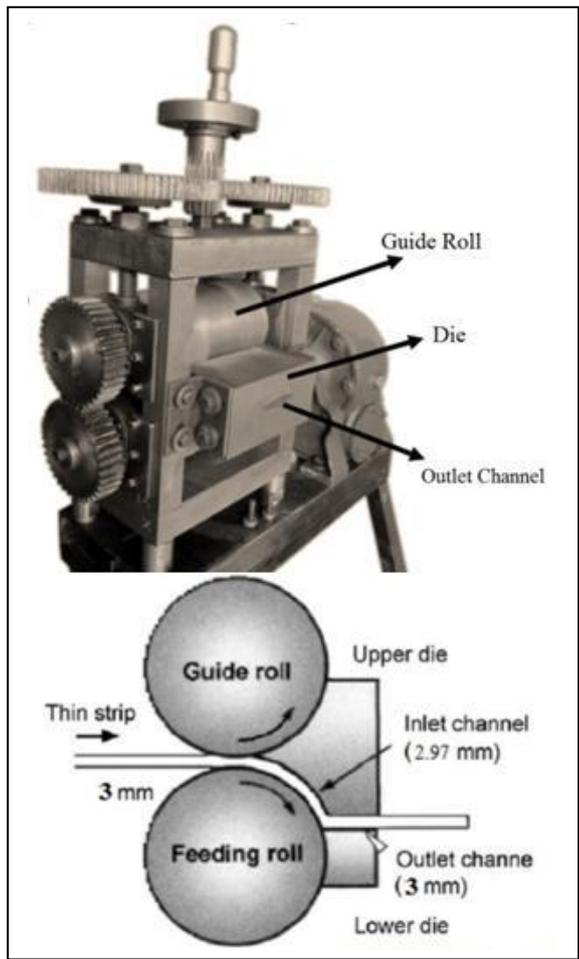


Figure1. The used device in this study, along with a schematic of the ECAR process

3. Results and Discussion

Figure 2 indicates the hardness variations for three bonding zones of copper- stainless steel based on the number of passes during ECAR process. The tendency of all the graphs is incremental, which is an evidence of the effect ECAR on increasing of hardness.

It can also be found that the highest hardness for the steel region is 262, the weld bond 143, and for the copper region 135 Wickers. Since pass 4 gives us the biggest hardness rate for all areas, the piece is annealed in this pass to analyze the effect of this thermal operation. In this regard, the diagram of Figure 3 is obtained after annealing treatment at various maximum temperatures, which shows that it is possible to control the hardness of the sheet by changing the annealing temperature. Mostly, it can be seen from the chart that it is possible to achieve to a lower hardness of 60 HV for steel area and to 100 HV for copper area by annealing treatment.

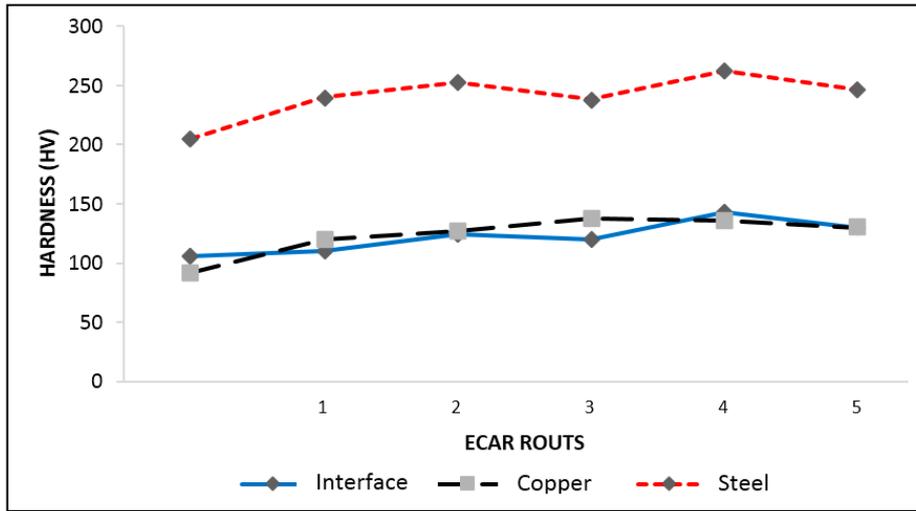


Figure2. The hardness of the two-layer sheet in various passes


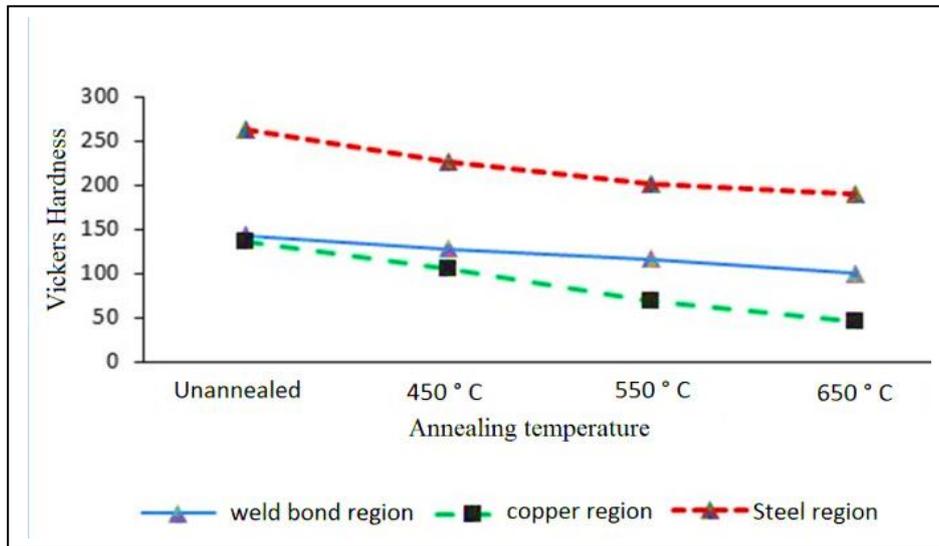


Figure3. The hardness of the two-layer sheet in different regions and annealing temperatures


Annealing, in addition to its hardening effect, can affect the width of the joint between two steel and copper metals, which can be checked through SEM images. Figure 4 shows that thermal treatment increases the weld band width and improves the interference between two stainless steel metals and finally increases the strength of the weld region.

Figure 4a presents that the thickness of interface is equal to 451 nm in non-thermal operation. According to Figures 4b and 4c, the interface thicknesses are equal to 508 and 677 nm in annealing conditions of 450°C with a duration of 1 and 3 hours, respectively.

It is obvious that by increasing the two factors of temperature and time, the penetration of the joint increases. This leads to an increase in the thickness of the weld band at the joint [28]. In fact, with increasing thermal treatment time, the activated penetration mechanism and the thickness of the intermetallic layer are significantly increased, and in some parts the intermetallic layer consists of several layers of different compounds, which will cause the sample to become brittle.

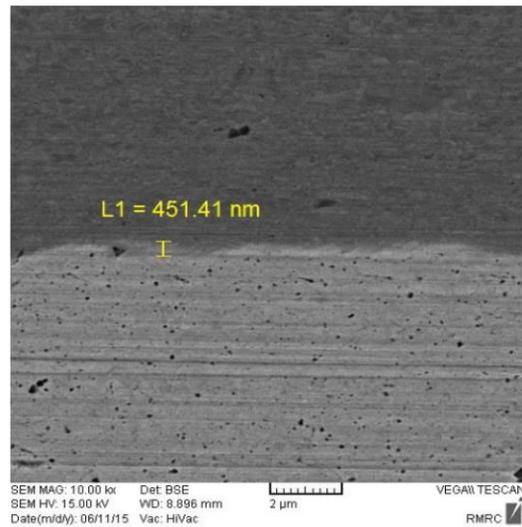

(a)

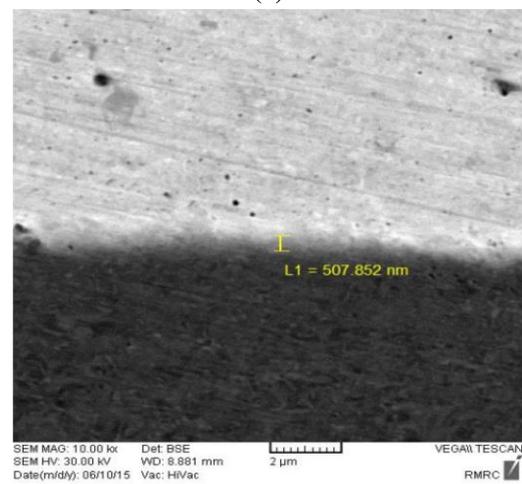


(b)




(c)

Figure4. Weld width thickness after heat treatment (a) without annealing (b) annealing at 450 ° C for 1 hour; (c) annealing at 450 ° C for 3 hours

The SEM images of the interface area at two annealing temperatures 550° C and 650° C for one hour have been shown in Figure 5.

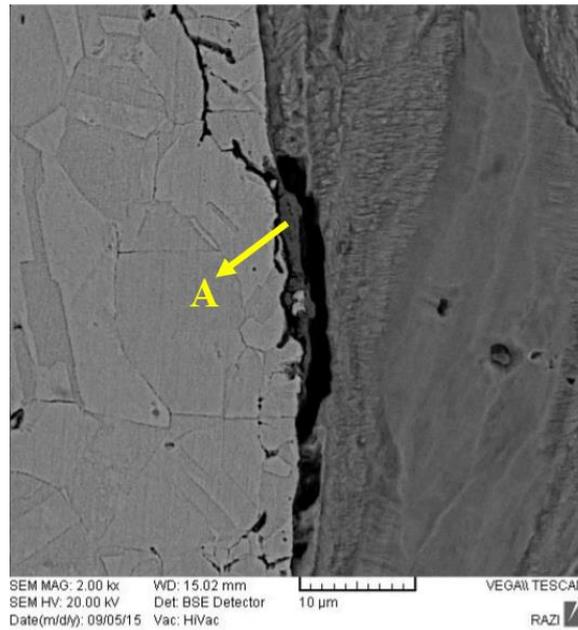

(a)

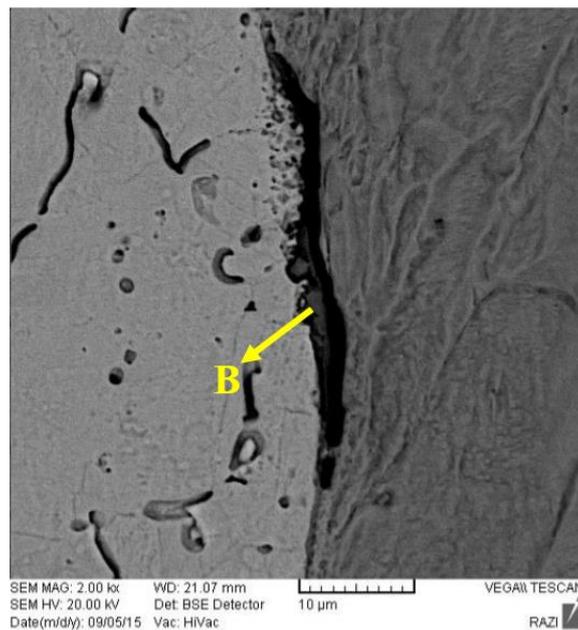

(b)

Figure5. SEM images of the interface area (a) Annealed at 550 ° C (b) Annealed at 650 ° C for one hour

As shown in Figure 5, with increasing annealing temperature, the weld band thickness is increased. In Figure 5, the formation of new phases is observed in a limited area of the interface area. This middle phase is one of the characteristics of explosive welding and, of course, the thermal treatment performed on it, caused by the induction of local heat and high shear stress at the interconnection

zone [28]. In order to investigate the effects of thermal treatment in different situations on weld bond, EDS analysis was used. Figure 6 shows the EDS analysis of the point A shown in Figure 5.

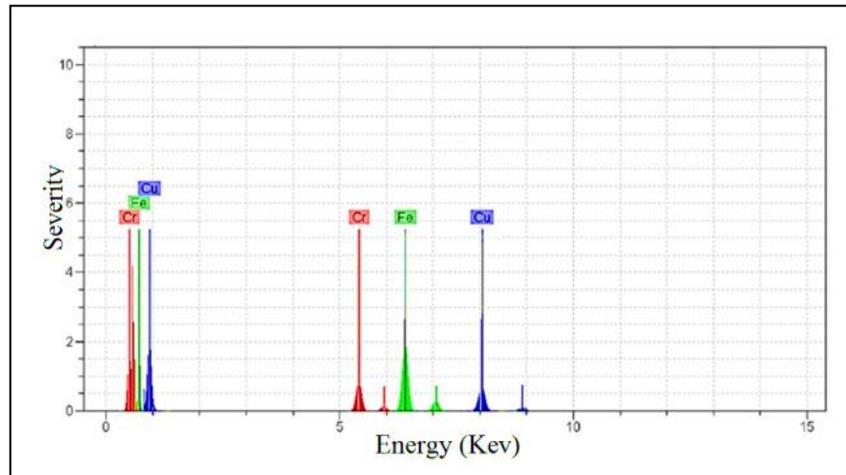


Figure6. The EDS analysis of the point A

The results of the EDS test indicate the presence of iron, copper and chromium in the joint. Therefore, the formation of the intermetallic compound in this section is obvious. Regarding the distribution of the elements, Fe_2Cu is one of the intermetallic compounds created on the interface. Of course, due to the wavy shape of the interface area, the ratios obtained in different parts of the interface will change. Figure 7 shows the EDS analysis of point B shown in Figure 5.

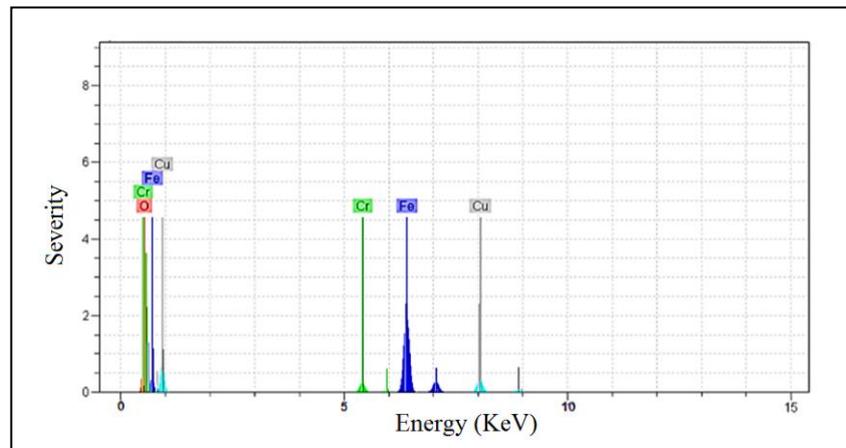


Figure7.The EDS analysis for point B shown in Figure 5

According to the results of the EDS analysis, annealing temperature is observed at $650^{\circ}C$, which is a mixture of iron oxide intermetallic. These results reported decreasing of the hardness about 16% for the weld bond in comparison with annealing temperature of $550^{\circ}C$.

4. Conclusion

In this study, the effects of thermal treatment at different temperatures on the weld bond of ECA Red bimetal copper-steel metal sheet were studied. The summary of the achievements of this

research are:

- After the annealing process, the hardness of the samples decreased in all three areas and the highest hardness rate was observed around the interface.
- Annealing treatment after ECAR process increased the penetration and thickness of the weld bond at the copper-steel interface.
- Increasing the heat treatment time at 450°C of annealing temperature from 1 to 3 hours increased the weld bond thickness by 50%.
- The EDS analysis of the weld bond at 550 and 650°C, respectively, confirmed the presence of intermetallic Fe₂Cu and FeO₂ compounds.

5. References

- [1] Borchers, C., Garve, C., Tiegel, M., Deutges, M., Herz, A., Edalati, K., Pippan, R., Horita, Z. and Kirchheim, R. 2015. Nanocrystalline Steel Obtained by Mechanical Alloying of Iron and Graphite Subsequently Compacted by High-Pressure Torsion. *ActaMaterialia*. 97:207-215.
- [2] Richert, M., McQueen, H.J. and Richert, J. 1998. Microband Formation in Cyclic Extrusion Compression of Aluminum. *Canadian metallurgical quarterly*. 37(5): 449-457.
- [3] Ebrahimi, M., Djavanroodi, F., Gode, C. and Nikbin, K.M. 2013. Numerical Prediction of the Effects of Material Properties on Strain Behavior During Equal Channel Angular Pressing . *Revue de Métallurgie–International Journal of Metallurgy*. 110(5): 341-348.
- [4] Moghaddam, A.O., Mazinani, A. and Ketabchi, M. 2017. Effect of Accumulative Roll Bonding and Equal Channel Angular Rolling on Microstructural and Mechanical Properties of Cu–Al–Mn Shape Memory Alloys. *Transactions of the Indian Institute of Metals*. 70(7): 1-9.
- [5] Honarpisheh, M., Nazari, F. and Ebrahimpour, V. 2017. Investigation of Constrained Groove Pressing on the Copper Sheets .*Iranian Journal of Mechanical Engineering Transactions of the ISME*. 19(1): 6-18. (In Persian)
- [6] Honarpisheh, M., Haghghat, E. and Kotobi, M. 2016. Investigation of Residual Stress and Mechanical Properties of Equal Channel Angular Rolled St12 Strips. *Proceedings of the Institution of Mechanical Engineers. Part L: Journal of Materials: Design and Applications*. 52(6): 389-396.
- [7] Kotobi, M. and Honarpisheh, M. 2017. Uncertainty Analysis of Residual Stresses Measured by Slitting Method in Equal-Channel Angular Rolled Al-1060 Strips. *The Journal of Strain Analysis for Engineering Design*. 52(2): 83-92.
- [8] Honarpisheh, M., Dehghani, M. and Haghghat, E. 2015. Investigation of Mechanical Properties of Al/Cu Strip Produced by Equal Channel Angular Rolling. *Procedia Materials Science*. 11: 1-5.
- [9] Lee, J.C., Seok, H.K. and Suh, J.Y. 2002. Microstructural Evolutions of the Al Strip Prepared by Cold Rolling and Continuous Equal Channel Angular Pressing. *ActaMaterialia*. 50(16): 4005-4019.
- [10] Nam, C.Y., Han, J.H., Chung, Y.H. and Shin, M.C. 2003. Effect of Precipitates on Microstructural Evolution of 7050 Al Alloy Sheet during Equal Channel Angular Rolling. *Materials Science and Engineering: A*. 347(1): 253-257.

- [11] Cheng, Y.Q., Chen, Z.H. and Xia, W.J. 2007. Drawability of AZ31 Magnesium Alloy Sheet Produced by Equal Channel Angular Rolling at Room Temperature. *Materials characterization*. 58(7): 617-622.
- [12] Cheng, Y.Q., Chen, Z.H., Xia, W.J. and Zhou, T. 2007. Effect of Channel Clearance on Crystal Orientation Development in AZ31 Magnesium Alloy Sheet Produced by Equal Channel Angular Rolling. *Journal of Materials Processing Technology*. 184(1): 97-101.
- [13] Habibi, A. and Ketabchi, M. 2012. Enhanced Properties of Nano-Grained Pure Copper by Equal Channel Angular Rolling and Post-Annealing. *Materials & Design*. 34: 483-487.
- [14] Hassani, F.Z. and Ketabchi, M. 2011. Nano Grained AZ31 Alloy Achieved by Equal Channel Angular Rolling Process. *Materials Science and Engineering: A*. 528(21): 6426-6431.
- [15] Azimi, A., Tutunchilar, S., Faraji, G. and Givi, M.B. 2012. Mechanical Properties and Microstructural Evolution during Multi-Pass ECAR of Al 1100-O Alloy. *Materials & Design*. 42: 388-394.
- [16] Mahmoodi, M., Sedighi, M. and Tanner, D.A. 2012. Investigation of Through Thickness Residual Stress Distribution in Equal Channel Angular Rolled Al 5083 Alloy by Layer Removal Technique and X-ray Diffraction. *Materials & Design*. 40: 516-520.
- [17] Kvačkanj, T., Kováčová, A., Kvačkanj, M., Kočiško, R., Lityńska-Dobrzyńska, L., Stoyka, V. and Miháliková, M. 2012. TEM Studies of Structure in OFHC Copper Processed by Equal Channel Angular Rolling. *Micron*. 43(6): 720-724.
- [18] Mahmoodi, M., Naderi, A., and Dini, G. 2017. Correlation Between Structural Parameters and Mechanical Properties of Al5083 Sheets Processed by ECAR. *Journal of Materials Engineering and Performance*. 26(12): 6022-6027.
- [19] Honarpisheh, M., Aghili, M. R., and Kotobi, M. 2015. Experimental Investigation of Thermal Conductivity of Aluminum Alloy 3003 Produced by Equal Channel Angular Rolling Process. *Journal of Modern Processes in Manufacturing and Production*. 4(4): 29-38.
- [20] Findik, F. 2011. Recent Developments in Explosive Welding. *Materials & Design*. 32(3): 1081-1093.
- [21] Honarpisheh, M., Asemabadi, M., and Sedighi, M. 2012. Investigation of Annealing Treatment on the Interfacial Properties of Explosive-Welded Al/Cu/Al Multilayer. *Materials & Design*. 37: 122-127.
- [22] Haghghat, H. and Mahdavi, M.M. 2013. Upper Bound Analysis of Bimetallic Rod Extrusion Process Through Rotating Conical Dies. *Journal of Theoretical and Applied Mechanics*. 51(3): 627-637.
- [23] Asemabadi, M., Sedighi, M. and Honarpisheh, M. 2012. Investigation of Cold Rolling Influence on the Mechanical Properties of Explosive-Welded Al/Cu Bimetal. *Materials Science and Engineering: A*. 558: 144-149.
- [24] Honarpisheh, M., Niksokhan, J. and Nazari, F. 2016. Investigation of the Effects of Cold Rolling on the Mechanical Properties of Explosively-Welded Al/St/Al Multilayer Sheet. *Metallurgical Research & Technology*. 113(1): 105-113.
- [25] Sedighi, M. and Honarpisheh, M. 2012. Investigation of Cold Rolling Influence on Near Surface Residual Stress Distribution in Explosive Welded Multilayer. *Strength of Materials*. 44(6): 693-698.

The Effect of Annealing Heat Treatment on the Bond of Explosive-welded Copper/Steel after the ECAR..., pp.29-38

- [26] Honarpisheh, M., and Gheysarian, A. 2017. An Experimental Study on the process parameters of Incremental Forming of Explosively-Welded Al/Cu Bimetal .Journal of Computational & Applied Research in Mechanical Engineering (JCARME). 7(1): 73-83.
- [27] Sakhtemanian, M. R., Honarpisheh, M. and Amini, S. 2017. Numerical and Experimental Study on the Layer Arrangement in the Incremental Forming Process of Explosive-Welded Low-Carbon Steel/CP-Titanium Bimetal Sheet .1-16.
- [28] Mousavi, S.A. and Sartangi, P.F. 2009. Experimental Investigation of Explosive Welding of Cp-Titanium/AISI 304 Stainless Steel. Materials & Design. 30(3): 459-468.