

Rayleigh Wave in an Initially Stressed Transversely Isotropic Dissipative Half-Space

B. Singh*

Department of Mathematics, Post Graduate Government College, Sector 11, Chandigarh, India

Received 18 May 2013; accepted 15 July 2013

ABSTRACT

The governing equations of a transversely isotropic dissipative medium are solved analytically to obtain the surface wave solutions. The appropriate solutions satisfy the required boundary conditions at the stress-free surface to obtain the frequency equation of Rayleigh wave. The numerical values of the non-dimensional speed of Rayleigh wave speed are computed for different values of frequency and initial stress parameter. The effects of transverse isotropy and initial stress parameter are observed on the Rayleigh wave speed.

© 2013 IAU, Arak Branch. All rights reserved.

Keywords: Transversely isotropic; Dissipative medium; Initial stress; Rayleigh wave; Frequency equation

1 INTRODUCTION

WE can understand the interior of the Earth better when we consider various additional parameters, e.g. porosity, initial stress, viscosity, dissipation, temperature, voids, diffusion, etc. Initial stresses in a medium are caused by various reasons such as creep, gravity, external forces, difference in temperatures, etc. The reflection of plane waves at free surface, interface and layers is important in estimating the correct arrival times of plane waves from the source. Various researchers studied the reflection and transmission problems at free surface, interfaces and in layered media. For example, Sinha [1] considered the problem of transmission of an elastic wave between two homogeneous half-space. Gupta [2] studied the reflection of plane waves from a linear transition layer in liquid media. Tooty, et al. [3] analyzed the reflected and transmitted waves generated by a plane, monochromatic, compressional wave incident at a plane interface between two half-spaces. Gupta [4] obtained plane wave reflection coefficients in a situation where an inhomogeneous material forms a transition layer between two homogeneous, elastic half-spaces. Gupta [5] also studied the propagation of SH-waves in inhomogeneous media. Acharya [6] studied the reflection of compressional waves for an elastic, isotropic, inhomogeneous medium in which compressional and shear-wave equations are separable. Cerveny [7] derived the formulae for the reflection and transmission coefficients of plane elastic waves for a transition layer. Singh, et al. [8] studied the reflection and refraction of SH-waves at the plane boundary between two laterally and vertically heterogeneous solids. Singh [9] studied the reflection from insulated and isothermal stress-free surface of a thermoelastic solid half-space under hydrostatic initial stress. Sharma [10] considered the propagation of plane waves in a general anisotropic elastic medium in the presence of initial stress and studied the reflection at the free plane surface for partition of energy among the three reflected waves.

The study of propagation of plane waves and reflection phenomena in the presence of initial stresses as well as dissipation is interesting. Dey and Dutta [11] studied the propagation and attenuation of seismic body waves in

* Corresponding author.

E-mail address: bsinghc11@gmail.com (B. Singh).

initially stressed dissipative medium. Selim and Ahmed [12] studied the propagation and attenuation of seismic body waves in dissipative medium under initial and couple stresses. With the help of Biot [13] theory of incremental deformation, Selim [14] studied the reflection of plane waves at a free surface of an initially stressed dissipative medium. Recently, Singh and Arora [15] studied the reflection of plane waves from a free surface of an initially stressed transversely isotropic dissipative medium.

Biot [16] studied the Rayleigh wave under the influence of initial stresses. Guz [17] studied the surface waves in bodies with initial stress. Babich, et al. [18] presented a review on elastic waves in bodies with initial stress. Rayleigh wave in the presence of both initial stress and dissipation parameters is not studied yet in literature. In the present paper, we studied the problem on Rayleigh wave at a stress-free surface of an initially stressed transversely isotropic solid half-space with dissipation. The frequency equation of the Rayleigh wave is obtained and analyzed numerically to observe the effects of initial stresses, dissipation and frequency on the non-dimensional speed of the Rayleigh wave.

2 FORMULATION OF THE PROBLEM AND SOLUTION

Following Biot [13], the basic dynamical equations of motion in x-z plane for an infinite, initially stressed medium, in the absence of external body forces are,

$$\begin{aligned} \frac{\partial s_{11}}{\partial x} + \frac{\partial s_{13}}{\partial z} - \rho \frac{\partial \omega}{\partial z} &= \rho \frac{\partial^2 u}{\partial t^2}, \\ \frac{\partial s_{31}}{\partial x} + \frac{\partial s_{33}}{\partial z} - \rho \frac{\partial \omega}{\partial x} &= \rho \frac{\partial^2 w}{\partial t^2}, \end{aligned} \quad (1)$$

where ρ is the density, $\omega = \frac{1}{2} \left(\frac{\partial w}{\partial x} - \frac{\partial u}{\partial z} \right)$ is rotational component, s_{ij} ($i, j = 1, 3$) are incremental stress components, u and w are the displacement components. Following Biot [13], the stress-strain relations are

$$\begin{aligned} s_{11} &= (C_{11} + P) \frac{\partial u}{\partial x} + (C_{13} + P) \frac{\partial w}{\partial z}, \\ s_{13} = s_{31} &= C_{44} \left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right), \\ s_{33} &= C_{33} \frac{\partial w}{\partial z} + C_{13} \frac{\partial u}{\partial x}, \end{aligned} \quad (2)$$

where C_{ij} are the incremental elastic coefficients. For dissipative medium, elastic coefficients are replaced by the following complex constants

$$\begin{aligned} C_{11} &\rightarrow C_{11}^R + iC_{11}^I, C_{13} \rightarrow C_{13}^R + iC_{13}^I, \\ C_{33} &\rightarrow C_{33}^R + iC_{33}^I, C_{44} \rightarrow C_{44}^R + iC_{44}^I, \end{aligned} \quad (3)$$

where, $i = \sqrt{-1}$, C_{11}^R , C_{11}^I , C_{13}^R , C_{13}^I , C_{33}^R , C_{33}^I , C_{44}^R , C_{44}^I are real. Following Fung [19], the stress and strain components in dissipative medium are,

$$s_{ij} = \bar{s}_{ij} e^{i\bar{\omega}t}, u_i = \bar{u}_i e^{i\bar{\omega}t}, \quad (4)$$

where ($i, j = 1, 3$) and $\bar{\omega}$ being the angular frequency. Using Eqs. (3) and (4), the Eq. (2) becomes,

$$\begin{aligned}\bar{s}_{11} &= (C_{11}^R + iC_{11}^I + P) \frac{\partial u}{\partial x} + (C_{13}^R + iC_{13}^I + P) \frac{\partial w}{\partial z}, \\ \bar{s}_{31} = \bar{s}_{13} &= (C_{44}^R + iC_{44}^I) \left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right), \\ \bar{s}_{33} &= (C_{33}^R + iC_{33}^I) \frac{\partial w}{\partial z} + (C_{13}^R + iC_{13}^I) \frac{\partial u}{\partial x}.\end{aligned}\quad (5)$$

With the help of Eq. (5), the Eq. (1) becomes

$$\begin{aligned}(C_{11}^R + P) \frac{\partial^2 \bar{u}}{\partial x^2} + (C_{13}^R + C_{44}^R + \frac{P}{2}) \frac{\partial^2 \bar{w}}{\partial x \partial z} + (C_{44}^R + \frac{P}{2}) \frac{\partial^2 \bar{u}}{\partial z^2} \\ + \rho \bar{\omega}^{-2} \bar{u} + i \left[C_{11}^I \frac{\partial^2 \bar{u}}{\partial x^2} + (C_{13}^I + C_{44}^I) \frac{\partial^2 \bar{w}}{\partial x \partial z} + C_{44}^I \frac{\partial^2 \bar{u}}{\partial z^2} \right] = 0,\end{aligned}\quad (6)$$

$$\begin{aligned}C_{33}^R \frac{\partial^2 \bar{w}}{\partial z^2} + (C_{13}^R + C_{44}^R + \frac{P}{2}) \frac{\partial^2 \bar{u}}{\partial x \partial z} + (C_{44}^R - \frac{P}{2}) \frac{\partial^2 \bar{w}}{\partial x^2} \\ + \rho \bar{\omega}^{-2} \bar{w} + i \left[(C_{13}^I + C_{44}^I) \frac{\partial^2 \bar{u}}{\partial x \partial z} + C_{44}^I \frac{\partial^2 \bar{w}}{\partial x^2} + C_{33}^I \frac{\partial^2 \bar{w}}{\partial z^2} \right] = 0.\end{aligned}\quad (7)$$

The surface wave solutions of Eqs. (6) and (7) are sought in the following form

$$u(x, z, t) = \phi(kz) e^{ik(x-ct)}, \quad w(x, z, t) = \psi(kz) e^{ik(x-ct)} \quad (8)$$

Making use of Eq. (8), the Eqs. (6) and (7) become

$$\left[a_1 + \rho c^2 + a_2 D^2 \right] \phi(kz) + a_3 D \psi(kz) = 0, \quad (9)$$

$$a_3 D \phi(kz) + \left[a_4 + \rho c^2 + a_5 D^2 \right] \psi(kz) = 0, \quad (10)$$

where $D = \frac{d}{dz}$ and

$$\begin{aligned}a_1 &= -(C_{11}^R + iC_{11}^I + P) \quad , \quad a_2 = \left(C_{44}^R + iC_{44}^I + \frac{P}{2} \right) \quad , \quad a_3 = i \left[\left(C_{44}^R + C_{44}^I + \frac{P}{2} \right) + i(C_{13}^I + C_{44}^I) \right], \\ a_4 &= -\left(C_{44}^R - \frac{P}{2} + iC_{44}^I \right) \quad , \quad a_5 = C_{33}^R + iC_{33}^I.\end{aligned}$$

Eqs. (9) and (10) have non-trivial solution if

$$D^4 + LD^2 + M = 0 \quad (11)$$

where

$$L = \frac{a_2 a_4 + a_1 a_5 - a_3^2 + \rho c^2 (a_2 + a_5)}{a_2 a_5}, \quad M = \frac{a_1 a_4 + \rho c^2 (a_1 + a_4) + \rho^2 c^4}{a_2 a_5}.$$

Let m_1^2, m_2^2 be the roots of corresponding auxiliary Eq.(11), then the general solutions of Eq. (11) are

$$u = \left[A_1 e^{-ikm_1 z} + A_2 e^{-ikm_2 z} + A_3 e^{ikm_1 z} + A_4 e^{ikm_2 z} \right] e^{ik(x-ct)} \quad (12)$$

$$w = \left[\varepsilon_1 A_1 e^{-ikm_1 z} + \varepsilon_2 A_2 e^{-ikm_2 z} + \varepsilon_1 A_3 e^{ikm_1 z} + \varepsilon_2 A_4 e^{ikm_2 z} \right] e^{ik(x-ct)} \quad (13)$$

where

$$\varepsilon_i = \frac{-\left[a_1 + \rho c^2 - a_2 k^2 m_i^2 \right]}{ikm_i a_3}, \quad (i = 1, 2)$$

$$m_1^2 + m_2^2 = \frac{-L}{k^2}, \quad m_1^2 m_2^2 = \frac{M}{k^4}$$

3 DERIVATION OF THE FREQUENCY EQUATION

We consider an initially stressed transversely isotropic dissipative solid half-space with x-axis as free surface and the negative z-axis is pointing into the half-space. The particular solutions in half space ($z \leq 0$)

$$u = \left[B_1 e^{ikm_1 z} + B_2 e^{ikm_2 z} \right] e^{ik(x-ct)} \quad (14)$$

$$w = \left[\varepsilon_1 B_1 e^{ikm_1 z} + \varepsilon_2 B_2 e^{ikm_2 z} \right] e^{ik(x-ct)} \quad (15)$$

The boundary condition at the free surface $z = 0$ are

$$\Delta f_x = 0, \quad \Delta f_z = 0 \quad (16)$$

where, $\Delta f_x = s_{13} + e_{13}P$, $\Delta f_z = s_{33}$.

The boundary conditions (16) are also written as:

$$\left(\frac{\partial u}{\partial z} + \frac{\partial w}{\partial x} \right) = 0, \quad (17)$$

$$\left(C_{33}^R + iC_{33}^I \right) \frac{\partial w}{\partial z} + \left(C_{13}^R + iC_{13}^I \right) \frac{\partial u}{\partial x} = 0. \quad (18)$$

With help of Eqs. (14) and (15) into Eqs. (17) and (18), we get

$$B_1 (m_1 + \varepsilon_1) + B_2 (m_2 + \varepsilon_2) = 0 \quad (19)$$

$$B_1 \left[\left(C_{33}^R + iC_{33}^I \right) \varepsilon_1 m_1 + \left(C_{13}^R + iC_{13}^I \right) \right] + B_2 \left[\left(C_{33}^R + iC_{33}^I \right) \varepsilon_2 m_2 + \left(C_{13}^R + iC_{13}^I \right) \right] = 0 \quad (20)$$

Eqs. (19) and (20) have non trivial solution if

$$(m_1 + \varepsilon_1) \left[(C_{33}^R + iC_{33}^I) \varepsilon_2 m_2 + (C_{13}^R + iC_{13}^I) \right] - (m_2 + \varepsilon_2) \left[(C_{33}^R + iC_{33}^I) \varepsilon_1 m_1 + (C_{13}^R + iC_{13}^I) \right] = 0, \quad (21)$$

which is the frequency equation of the Rayleigh wave in an initially stressed transversely isotropic dissipative medium. In absence of initial stresses and dissipation, we have

$$P = 0, \quad C_{11}^I = 0, \quad C_{13}^I = 0, \quad C_{33}^I = 0. \quad (22)$$

Then, the above analysis reduces for the case of Rayleigh wave in a transversely isotropic medium.

4 NUMERICAL RESULTS

For numerical purpose, a particular example of the Zinc material is chosen with the following physical constants,

$$\begin{aligned} C_{11}^R &= 1.628 \times 10^{10} \text{ N.m}^{-2}, C_{33}^R = 1.562 \times 10^{10} \text{ N.m}^{-2}, C_{13}^R = 0.508 \times 10^{10} \text{ N.m}^{-2}, \\ C_{44}^R &= 0.385 \times 10^{10} \text{ N.m}^{-2}, C_{11}^I = 1.025 \times 10^{10} \text{ N.m}^{-2}, C_{33}^I = 0.950 \times 10^{10} \text{ N.m}^{-2}, \\ C_{13}^I &= 0.425 \times 10^{10} \text{ N.m}^{-2}, C_{44}^I = 0.325 \times 10^{10} \text{ N.m}^{-2}, \rho = 7.14 \times 10^3 \text{ kg.m}^{-3}. \end{aligned}$$

The non-dimensional speeds $(\rho c^2 / c_{44}^R)$, $(\rho c^2 / c_{11}^R)$, $(\rho c^2 / c_{33}^R)$ and $(\rho c^2 / c_{13}^R)$ of the Rayleigh wave are computed for a certain range of the frequency and initial stress parameter in absence and presence of dissipation. The numerical values of non-dimensional speeds $(\rho c^2 / c_{44}^R)$, $(\rho c^2 / c_{11}^R)$, $(\rho c^2 / c_{33}^R)$ and $(\rho c^2 / c_{13}^R)$ are shown graphically versus frequency in Figs. 1, 3, 5 and 7. From Figs. 1, 3, 5 and 7, it is observed that the values of non-dimensional speeds increase very sharply in low frequency range. The comparison of solid and dotted curves in Figs. 1, 3, 5 and 7 shows the significant effect of dissipation on the non-dimensional speed of Rayleigh wave. The non-dimensional speeds of Rayleigh wave decrease in presence of dissipation for the chosen range of the frequency.

The numerical values of non-dimensional speeds $(\rho c^2 / c_{44}^R)$, $(\rho c^2 / c_{11}^R)$, $(\rho c^2 / c_{33}^R)$ and $(\rho c^2 / c_{13}^R)$ are shown graphically versus initial stress parameter ($P^* = P/c_{44}^R$) in Figs. 2, 4, 6 and 8. For the range $2 \leq P^* \leq 10$, the non-dimensional speeds of Rayleigh wave first increases slowly to its maximum and then decreases slowly. The comparison of solid and dotted curves in Figs. 2, 4, 6 and 8 shows the significant effect of dissipation on the non-dimensional speeds. The non-dimensional speeds of Rayleigh wave decrease in presence of dissipation for the chosen range of initial stress parameter.

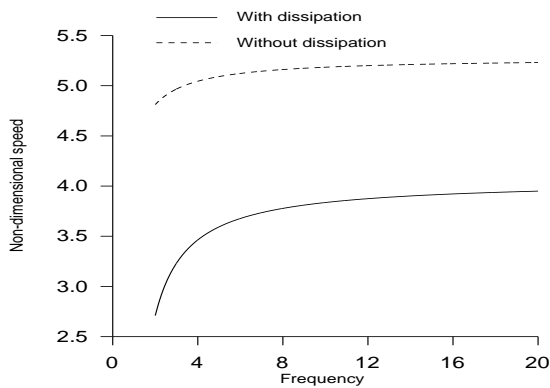


Fig. 1
Variation of the non-dimensional speed $(\rho c^2 / c_{44}^R)$ versus frequency ω .

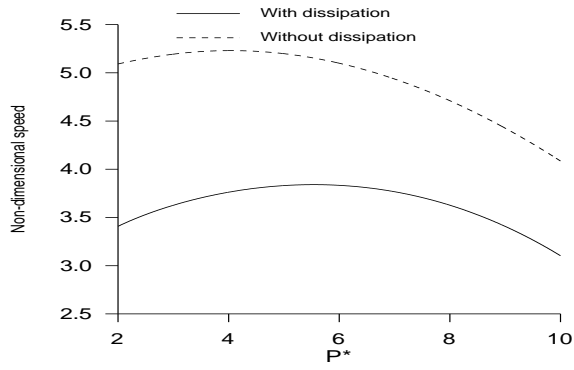


Fig. 2
Variation of the non-dimensional speed ($\rho c^2 / c_{44}^R$) versus initial stress ($P^* = P/c_{44}^R$).

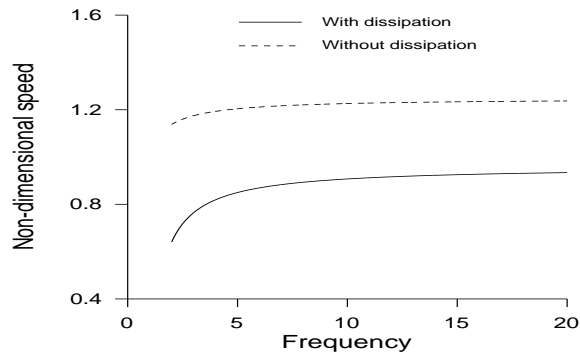


Fig. 3
Variation of the non-dimensional speed ($\rho c^2 / c_{11}^R$) versus frequency ω .

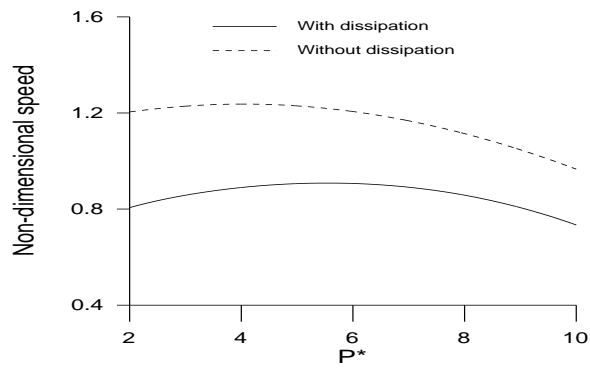


Fig. 4
Variation of the non-dimensional speed ($\rho c^2 / c_{11}^R$) versus initial stress ($P^* = P/c_{44}^R$).

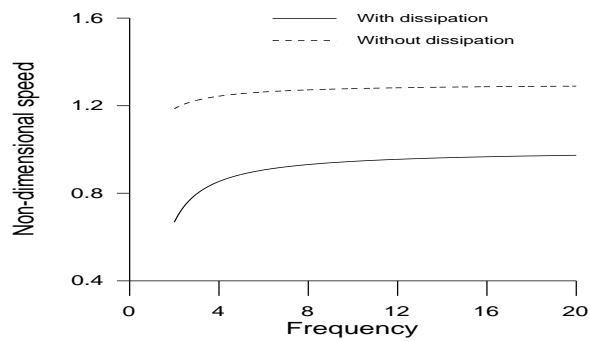


Fig. 5
Variation of the non-dimensional speed ($\rho c^2 / c_{33}^R$) versus frequency ω .

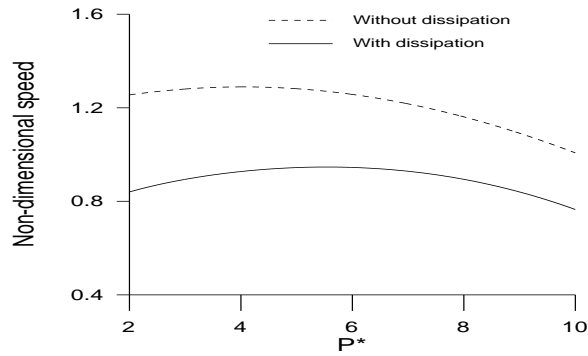


Fig. 6
Variation of the non-dimensional speed ($\rho c^2 / c_{33}^R$) versus initial stress ($P^* = P/c_{44}^R$).

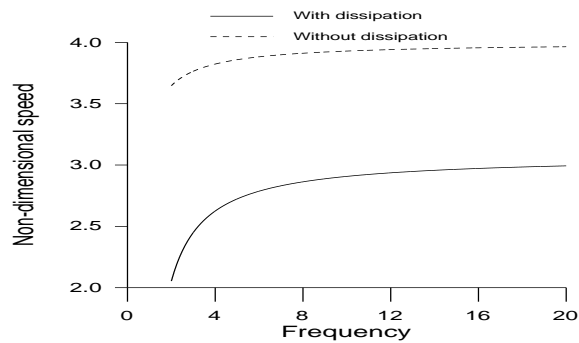


Fig. 7
Variation of the non-dimensional speed ($\rho c^2 / c_{13}^R$) versus frequency ω .

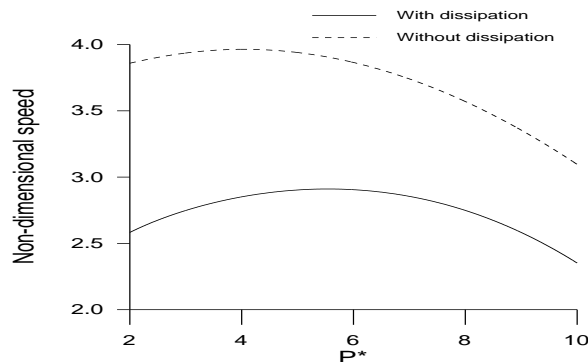


Fig. 8
Variation of the non-dimensional speed ($\rho c^2 / c_{13}^R$) versus initial stress ($P^* = P/c_{44}^R$).

5 CONCLUSIONS

The surface wave solutions of the governing equations of an initially stressed transversely isotropic dissipative medium are obtained in the half-space. With the help of these solutions and the required boundary conditions at the free surface of the half-space, the frequency equation of the Rayleigh wave is derived. A numerical example is chosen for numerical computations of the non-dimensional speed of Rayleigh wave. The effects of dissipation, initial stresses and frequency on the non-dimensional speed of Rayleigh wave are obtained significantly.

REFERENCES

- [1] Sinha S.B., 1964, Transmission of elastic waves through a homogenous layer sandwiched in homogenous media, *Journal of Physics of the Earth* **12**:1-4.
- [2] Gupta R. N., 1965, Reflection of plane waves from a linear transition layer in liquid media, *Geophysics* **30**:122-131.

- [3] Tooly R. D., Spencer T.W., Sagoci H.F., 1965, Reflection and transmission of plane compressional waves, *Geophysics* **30**:552-570.
- [4] Gupta R.N., 1966, Reflection of elastic waves from a linear transition layer, *The Bulletin of the Seismological Society of America* **56**:511-526.
- [5] Gupta R. N., 1967, Propagation of SH-waves in inhomogeneous media, *The Journal of the Acoustical Society of America* **41**:1328-1329.
- [6] Acharya H.K., 1970, Reflection from the free surface of inhomogeneous media, *The Bulletin of the Seismological Society of America* **60**:1101-1104.
- [7] Cerveny V., 1974, Reflection and transmission coefficients for transition layers, *Studia Geophysica et Geodaetica* **17**:59-68.
- [8] Singh B. M., Singh S. J., Chopra S. D., 1978, Reflection and refraction of SH-waves at the plane boundary between two laterally and vertically heterogeneous solids, *Acta Geophysica Polonica* **26**:209-216.
- [9] Singh B., 2008, Effect of hydrostatic initial stresses on waves in a thermoelastic solid half-space, *Applied Mathematics and Computation* **198**:498-505.
- [10] Sharma M. D., 2007, Effect of initial stress on reflection at the free surfaces of anisotropic elastic medium, *Journal of Earth System Science* **116**:537-551.
- [11] Dey S., Dutta D., 1998, Propagation and attenuation of seismic body waves in initially stressed dissipative medium, *Acta Geophysica Polonica* **46**: 351-365.
- [12] Selim M. M., Ahmed M. K., 2006, Propagation and attenuation of seismic body waves in dissipative medium under initial and couple stresses, *Applied Mathematics and Computation* **182**:1064-1074.
- [13] Biot M. A., 1965, *Mechanics of Incremental Deformation*, John Wiley and Sons Inc., New York.
- [14] Selim M. M., 2008, Reflection of plane waves at free surface of an initially stressed dissipative medium, *World Academy of Science, Engineering and Technology* **30**:36-43.
- [15] Singh B., Arora J., 2011, Reflection of plane waves from a free surface of an initially stressed transversely isotropic dissipative medium, *Applied Mathematics* **2**:1129-1133.
- [16] Biot M. A., 1940, The influence of initial stress on elastic waves, *Journal of Applied Physics* **11**:522-530.
- [17] Babich S. Y., Guz A. N., Zhuk A. P., 1979 , Elastic waves in bodies with initial stress, *Soviet Applied Mechanics* **15**:277-291.
- [18] Guz A.N., 2002, Elastic waves in bodies with initial (residual) stresses, *International Applied Mechanics* **38**:23-59.
- [19] Fung Y. C., 1965, *Foundation of Solid Mechanics*, Prentice Hall of India, New Delhi.